

## DP-10

### Light Duty Two Post Lifts

10,000 lbs. Capacity

#### Features:

- Spot-Rite™ 3-stage front arms - spot vehicles asymmetrically or symmetrically
- Hydraulic direct pull cylinders
- Single point lock release
- Extended height model
- Includes adapter extensions and storage bracket
- Warranty:  
Five years structural, 18 month parts, and six months labor
- ALI certified



Model Shown:  
FWD DP10AN422BL  
10,000 lbs. capacity extended height model



Model Shown:  
FWD DP10AN400BL  
10,000 lbs. capacity

#### Low-Profile Threaded Adapter Design:


The DP10 features low-profile, oversized pads with multiple extensions to raise most vehicles on the road today. Includes four (each) adapter extensions at 3.5" and 5"



#### Spot-Rite™ 3-Stage Front Arm Design

Accommodate vehicles both symmetrically and asymmetrically.

Position the vehicle doors in front of or behind the lift columns to prevent door damage and allow easy technician access!

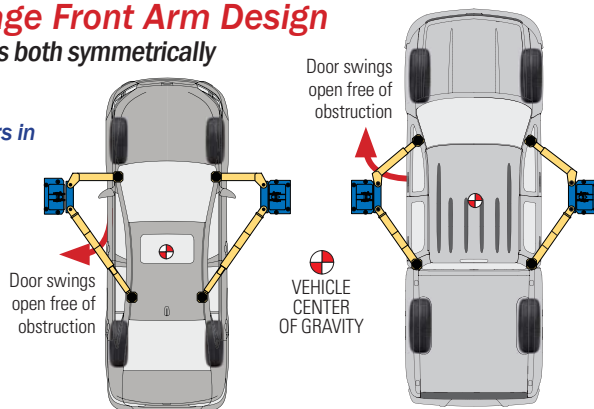

Asymmetric Vehicle Placement

Symmetric Vehicle Placement

SPECIFICATIONS	DP10AN400BL DP10AN422BL
Capacity	10,000 lbs. (4535kg)
Rise	76-1/4" (1937mm) 79-3/4" (2025mm)
Overall Height	143" (3632mm) 166-3/8" (4226mm)
Overall Width	131" or optional 137" (3327/4380mm)
Drive through clearance	99" or optional 105" (2515/2667mm)
Overhead switch height	137-5/8" (3496mm) 160-3/4" (4083mm)
Front reach (Min/Max)	23" / 44-1/2" (584mm/1130mm)
Rear reach (Min/Max)	36" / 58" (914mm / 1473mm)
Min/Max adapter height	3-3/4" (95mm) no adapter extension 8-3/4" (222mm) w/5" adapter extension
Width inside column	109" or optional 115" (2769mm / 2921mm)
Voltage/Amps	208V/17 amps / 230V/16 amps
Motor/phase	1ph/2HP/60Hz
Ceiling height required	144" (3658mm) 167" (4242mm)

Lifts available in blue and red

Specifications subject to change without notice or liability.